





RPU-RM1

RPU-RM2

VAL0130881/SKC7322712

VAL0130882/SKC7327126

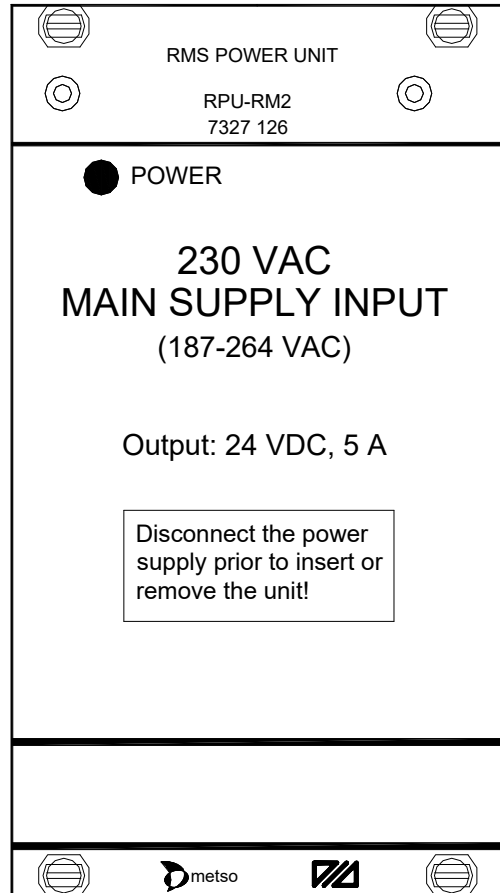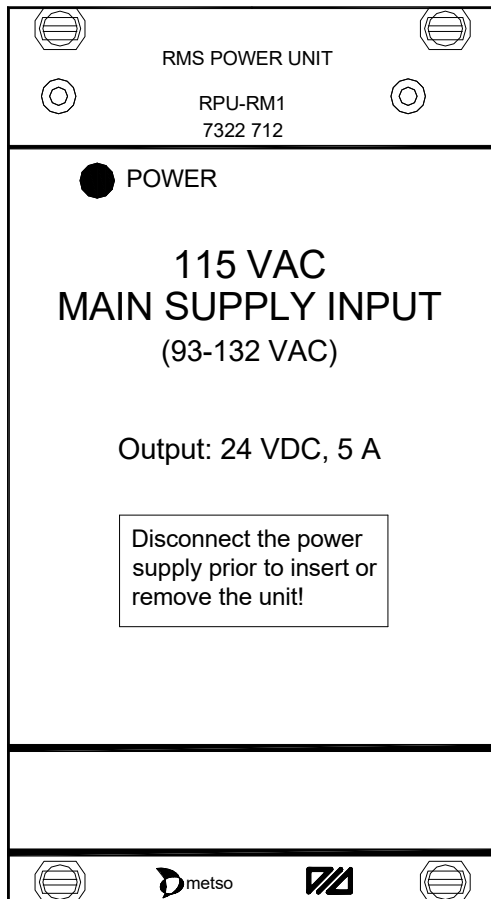

RMS POWER UNIT USER'S MANUAL



1 GENERAL

The RPU-RM1 and RPU-RM2 are measuring modules for the RMS-RS1.
The RPU-RM1 is intended for use with 115 VAC and the RPU-RM2 for 230 VAC primary voltage.
The units are primary switched and provide 24VDC, max. 5 A.

2 TECHNICAL DATA

Input voltage:	RPU-RM1: 93-132 VAC, 44-62 Hz RPU-RM2: 187-264 VAC, 44-62 Hz
Output voltage:	24 VDC, 5 A
Current limit:	5.5 A
Surge protection:	28 VDC
Short circuit protection:	Continual, automatic restart
Temperature range:	0 to +70 °C
Storage temperature:	-25 to +85 °C
Relative humidity:	5 to 95 %, non-condensing
Module size:	Height=129 mm (3 HE), Width=71 mm (14 TE), Depth=190 mm
Weight:	1.35 kg
Encapsulation:	Aluminium cassette

3 CONTACT

Sales, development, production and service:

Dametric AB

Jägerhorns Väg 19, SE 141 75 Kungens Kurva, Sweden
Phone: +46-8 556 477 00 Telefax: +46-8 556 477 29
E-Mail: service@dametric.se Website: www.dametric.se

dametric 

Valmet 