




K-DDRS2

VAL 0142258 / SKC9635108

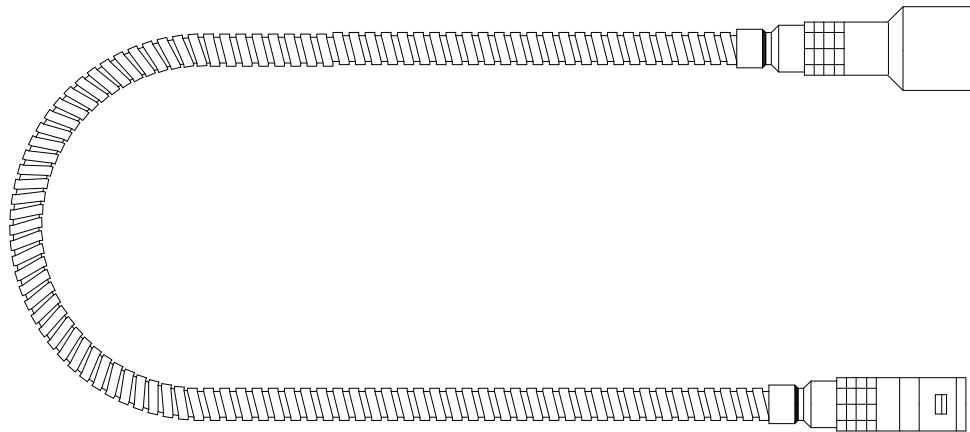

ROTATING CABLE TO RMS-DD

MANUAL



1 TECHNICAL SPECIFICATION

Connector, K1:	6-pole with bayonet, LE-2S-ISO + LE-2E-KABF
Connector, K2:	6-pole with bayonet, LE-2S-ISO + LE-2E-KABM
Cable:	Teflon isolated wire, AWG20
Protection:	Flexible stainless steel tube
Length:	0.24 m

2 CONNECTION DIAGRAM



3 CONTACT

Sales, development, production and service:

Dametric AB

Jägerhorns Väg 19, SE 141 75 Kungens Kurva, Sweden

Phone: +46-8 556 477 00

Telefax: +46-8 556 477 29

E-Mail: service@dametric.se

Website: www.dametric.se

dametric 

Valmet 