




(86) Date de dépôt PCT/PCT Filing Date: 2004/03/09
 (87) Date publication PCT/PCT Publication Date: 2004/10/07
 (45) Date de délivrance/Issue Date: 2011/08/09
 (85) Entrée phase nationale/National Entry: 2005/09/19
 (86) N° demande PCT/PCT Application No.: SE 2004/000339
 (87) N° publication PCT/PCT Publication No.: 2004/085070
 (30) Priorité/Priority: 2003/03/24 (SE0300794-5)

(51) Cl.Int./Int.Cl. *B02C 7/14* (2006.01),
D21D 1/30 (2006.01), *G01B 7/14* (2006.01)
 (72) Inventeur/Inventor:
 AKERBLOM, BENGT, SE
 (73) Propriétaire/Owner:
 DAPROX AB, SE
 (74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : PROCÉDE ET DISPOSITIF DE MESURE DE DISTANCES
 (54) Title: A METHOD AND A SENSOR DEVICE FOR MEASURING THE DISTANCE BETWEEN A STATOR AND AN OPPOSING ROTOR

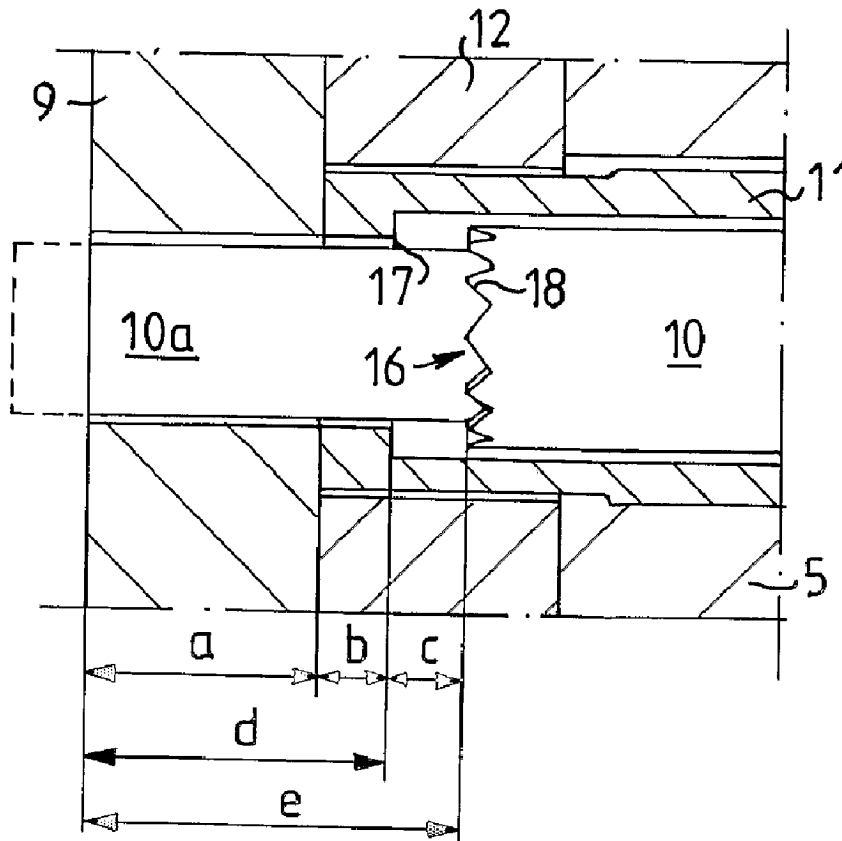

(57) **Abrégé/Abstract:**

A sensor device for measuring distance between a stator and a rotor in a machine is of the magnetic type and is intended to be mounted in the stator in order to interact with an opposing surface on the rotor. A sensor body (10) can be moved axially in a

(57) **Abrégé(suite)/Abstract(continued):**

housing (11) mounted in the stator by means of an operating mechanism (13) and has a stop (16) at a predetermined distance (e) from its end surface designed to interact with a corresponding stop (17) inside the housing. This distance (e) exceeds the distance (d) between the stop (17) in the housing and the end of the sensor body (10) by a predetermined distance (c) when the sensor body is in its normal measuring position. These stops (16, 17) make possible a particularly accurate calibration of the sensor device.