



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2519892 C 2011/08/09

(11)(21) **2 519 892**

(12) **BREVET CANADIEN**
CANADIAN PATENT

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 2004/03/09
(87) Date publication PCT/PCT Publication Date: 2004/10/07
(45) Date de délivrance/Issue Date: 2011/08/09
(85) Entrée phase nationale/National Entry: 2005/09/19
(86) N° demande PCT/PCT Application No.: SE 2004/000339
(87) N° publication PCT/PCT Publication No.: 2004/085070
(30) Priorité/Priority: 2003/03/24 (SE0300794-5)

(51) Cl.Int./Int.Cl. *B02C 7/14*(2006.01),
D21D 1/30(2006.01), *G01B 7/14*(2006.01)


(72) Inventeur/Inventor:
AKERBLOM, BENGT, SE

(73) Propriétaire/Owner:
DAPROX AB, SE

(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : PROCEDE ET DISPOSITIF DE MESURE DE DISTANCES

(54) Title: A METHOD AND A SENSOR DEVICE FOR MEASURING THE DISTANCE BETWEEN A STATOR AND AN
OPPOSING ROTOR

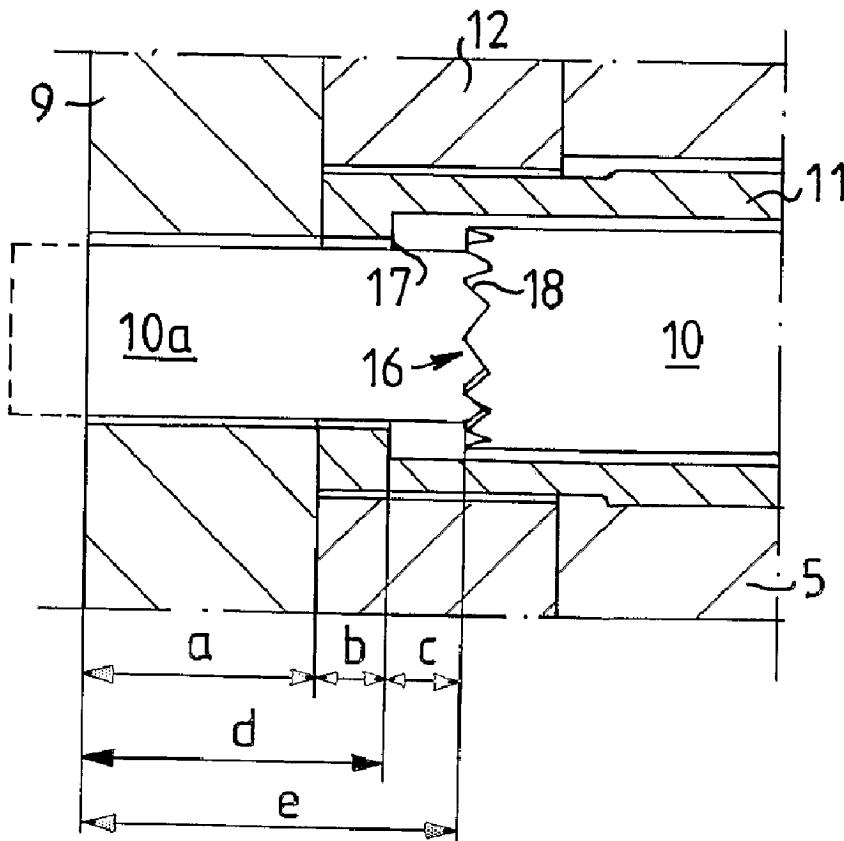

(57) Abrégé/Abstract:

A sensor device for measuring distance between a stator and a rotor in a machine is of the magnetic type and is intended to be mounted in the stator in order to interact with an opposing surface on the rotor. A sensor body (10) can be moved axially in a

(57) Abrégé(suite)/Abstract(continued):

housing (11) mounted in the stator by means of an operating mechanism (13) and has a stop (16) at a predetermined distance (e) from its end surface designed to interact with a corresponding stop (17) inside the housing. This distance (e) exceeds the distance (d) between the stop (17) in the hosing and the end of the sensor body (10) by a predetermined distance (c) when the sensor body is in its normal measuring position. These stops (16, 17) make possible a particularly accurate calibration of the sensor device.