

Office de la Propriété Intellectuelle du Canada

Un organisme d'Industrie Canada

Canadian Intellectual Property Office

An agency of Industry Canada CA 2567778 A1 2005/12/08

(21) 2 567 778


## (12) DEMANDE DE BREVET CANADIEN CANADIAN PATENT APPLICATION

(13) **A1** 

- (86) Date de dépôt PCT/PCT Filing Date: 2005/05/20
- (87) Date publication PCT/PCT Publication Date: 2005/12/08
- (85) Entrée phase nationale/National Entry: 2006/11/22
- (86) N° demande PCT/PCT Application No.: SE 2005/000750
- (87) N° publication PCT/PCT Publication No.: 2005/116576
- (30) Priorité/Priority: 2004/05/28 (SE0401372-8)

- (51) Cl.Int./Int.Cl. *G01B 7/06* (2006.01), *G01B 13/06* (2006.01)
- (71) Demandeur/Applicant: DAPROX AB, SE
- (72) Inventeur/Inventor: AKERBLOM, BENGT, SE
- (74) Agent: GOWLING LAFLEUR HENDERSON LLP

- (54) Titre : DISPOSITIF DE MESURE ET PROCEDE DE MESURE DE L'EPAISSEUR D'UNE COUCHE D'UNE BANDE MOBILE
- (54) Title: MEASURING DEVICE AND A METHOD FOR MEASURING THE THICKNESS OF A LAYER OF A MOVING STRIP

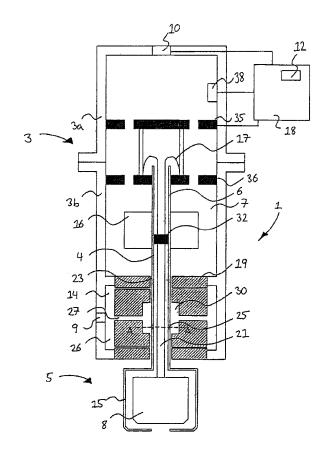

(57) Abrégé/Abstract:

The present invention relates to a measuring device (1) and a method for measuring the thickness of at least one layer (2) of a moving strip. The measuring device (1) comprises a transmitter body (4), which is axially movable within a transmitter housing (3)





(21) 2 567 778

(13) A1

## (57) Abrégé(suite)/Abstract(continued):

and has a sensor head (5), projecting from the transmitter housing (3) and designed to rest against the layer via a gas cushion (2), and an upper portion (6), extending into a chamber (7) delimited within the transmitter housing (3). The transmitter housing (3) is provided with at least one port (9) for the supply of gas, which, in part, forms the said gas cushion and, in part, flows into the chamber (7). The measuring device is characterized in that the transmitter housing (3) is provided with a restrictor (10) for evacuating gas from the chamber (7). The method comprises the step of measuring the thickness of the layer (2) by means of a measuring device (1), the restrictor (10) being adjusted in such a way that the gas cushion exerts a pressure against the layer (2) equivalent to a weight of 0-65 g/cm2.