

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 December 2005 (08.12.2005)


PCT

(10) International Publication Number
WO 2005/116576 A1

- (51) International Patent Classification⁷: G01B 7/06, 13/06 (74) Agent: ALBIHNS STOCKHOLM AB; P.O. Box, S-114 85 Stockholm (SE).
- (21) International Application Number: PCT/SE2005/000750 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 20 May 2005 (20.05.2005)
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data: 0401372-8 28 May 2004 (28.05.2004) SE
- (71) Applicant (for all designated States except US): DAPROX AB [SE/SE]; Box 120, S-127 23 SKÄRHOLMEN (SE). (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): ÅKERBLOM, Bengt [SE/SE]; Vårby Allé 23, S-143 40 VÅRBY (SE).

[Continued on next page]

(54) Title: MEASURING DEVICE AND A METHOD FOR MEASURING THE THICKNESS OF A LAYER OF A MOVING STRIP

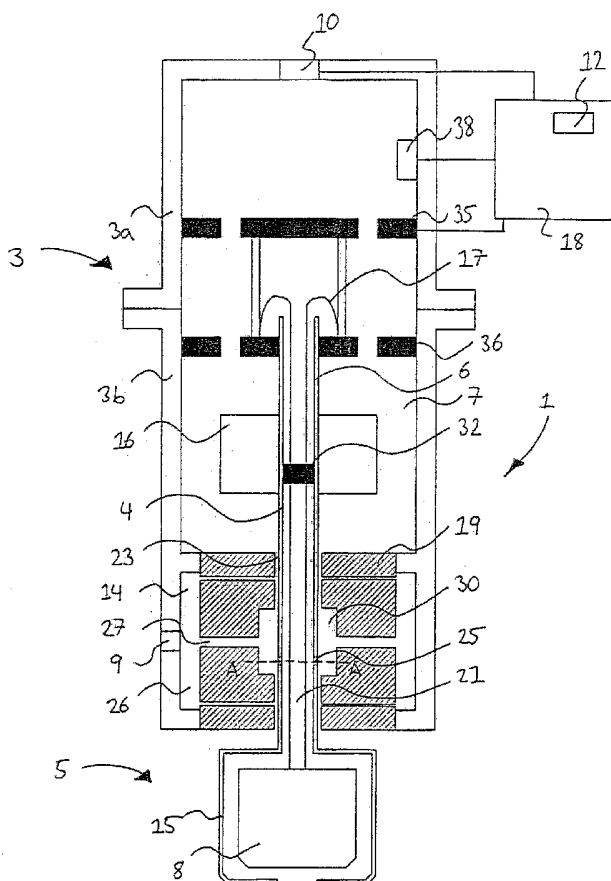

(57) Abstract: The present invention relates to a measuring device (1) and a method for measuring the thickness of at least one layer (2) of a moving strip. The measuring device (1) comprises a transmitter housing (3) and has a sensor head (5), projecting from the transmitter housing (3) and designed to rest against the layer (2) via a gas cushion (2), and an upper portion (6), extending into a chamber (7) delimited within the transmitter housing (3). The transmitter housing (3) is provided with at least one port (9) for the supply of gas, which, in part, forms the said gas cushion and, in part, flows into the chamber (7). The measuring device is characterized in that the transmitter housing (3) is provided with a restrictor (10) for evacuating gas from the chamber (7). The method comprises the step of measuring the thickness of the layer (2) by means of a measuring device (1), the restrictor (10) being adjusted in such a way that the gas cushion exerts a pressure against the layer (2) equivalent to a weight of 0-65 g/cm².

WO 2005/116576 A1



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*