

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 December 2006 (21.12.2006)

PCT

(10) International Publication Number
WO 2006/135331 A1


- (51) International Patent Classification:
G01B 7/14 (2006.01) D21D 1/30 (2006.01)
B02C 7/14 (2006.01)
- (21) International Application Number:
PCT/SE2006/050145
- (22) International Filing Date: 22 May 2006 (22.05.2006)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0501346-1 14 June 2005 (14.06.2005) SE
- (71) Applicant (for all designated States except US): DAPROX AB [SE/SE]; P.o. Box 120, S-127 23 Skärholmen (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): ÅKERBLOM, Bengt [SE/SE]; Vårby Allé 23, S-143 40 Vårby (SE).
OLLMAR, Jonas [SE/SE]; Skebokvarnsvägen 289, S-124 53 Bandhagen (SE).
- (74) Agent: ALBIHNS STOCKHOLM AB; P.o. Box 5581, S-114 85 Stockholm (SE).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND ARRANGEMENT FOR MOUNTING A SENSOR DESIGNED FOR MEASURING THE DISTANCE BETWEEN STATOR AND ROTOR

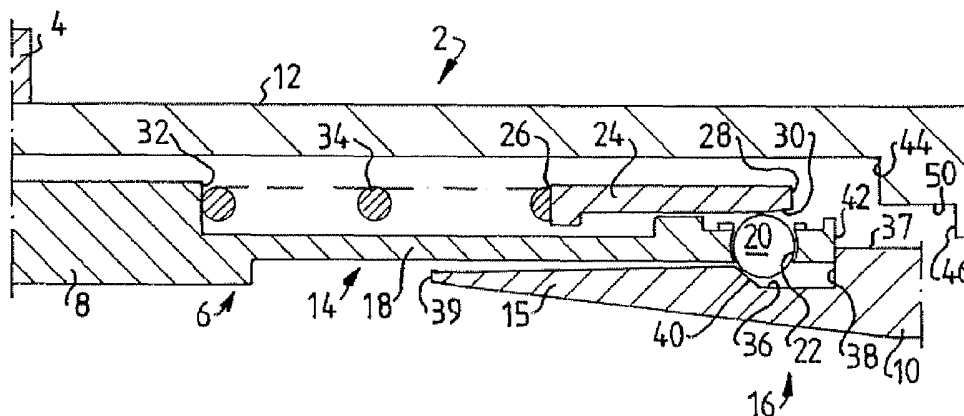

(57) Abstract: The invention relates to a sensor (6) for measuring the distance between a stator and a rotor, which sensor is of the magnetic type and has a sensor body (8) to which is attached a sensor tip (10). The tip of the sensor (10) is connected to the sensor body (8) by a fixing arrangement (14) that has a locking device (16) that interacts with engaging devices (24) and a spring arrangement (34). The locking device (16) is pressed towards an attaching position (A) by the action of a spring force F1 exerted by means of the spring arrangement (34) against the engaging device (24), fixing the sensor body (8) and the tip of the sensor (10) in relation to each other. By the application of a force F2 on the sensor body (8) that is greater than the spring force F1, it is possible to move the sensor body and the tip of the sensor to a releasing position (D), releasing them in relation to each other.

WO 2006/135331 A1