




- (51) **International Patent Classification:**  
*G01N 27/02* (2006.01)      *G01N 33/34* (2006.01)  
*D21B 1/14* (2006.01)      *G01N 33/40* (2006.01)  
*D21D 1/30* (2006.01)
- (21) **International Application Number:** PCT/SE2014/051209
- (22) **International Filing Date:** 13 October 2014 (13.10.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:** 1351299-1 4 November 2013 (04.11.2013) SE
- (71) **Applicant:** DAPROX AB [SE/SE]; Jägerhorns väg 19, S-141 75 Kungens Kurva (SE).
- (72) **Inventor:** ÅKERBLOM, Bengt; Vårby Allé 23, S-143 40 Vårby (SE).
- (74) **Agents:** ZACCO SWEDEN AB et al.; P.O. Box 5581, S-114 85 Stockholm (SE).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report (Art. 21(3))

(54) **Title:** A DEVICE FOR DETECTING PROFILE IN REFINER AND METHOD THEREFORE

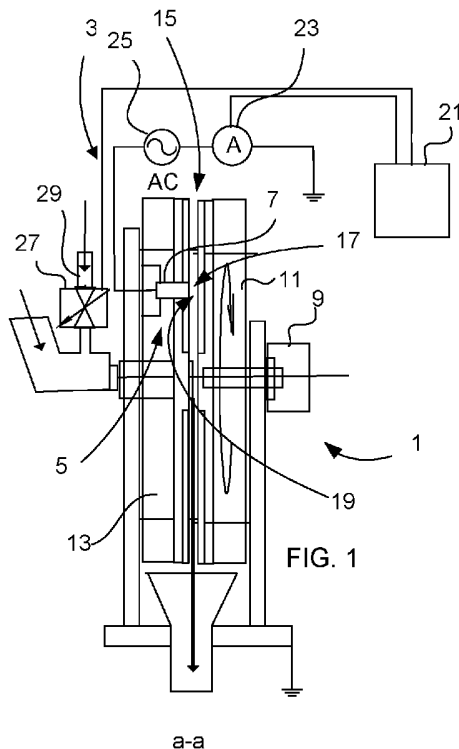

(57) **Abstract:** The invention regards a measuring device, comprising a conductor body (7), for detecting the degree of fiber concentration and/or steam point (SP) of a fiber pad (33) being pulped, during use of the device (3), in a grinding gap (15) between refiner discs (11, 13) of a refiner (1). The conductor body (7) exhibits a first electric contact surface (17) adapted to provide electrical contact with a second electric contact surface (19) for transferring an electric current via the fiber pad (33) material. The invention also regards a method for detecting the degree of fiber concentration and/or steam point (SP) of a fiber pad (33). The method comprises the steps of mounting of the conductor body (7) to one of the refiner discs (13), grinding the fiber pad (33) material between the refiner discs (11, 13), detecting alteration of the conductivity and/or electrical resistivity of the fiber pad (33) material, and adjusting inflow of water and/or fiber material from said detected alteration.